



FUJIAN YAHENG POWER TECHNOLOGY GROUP CO.,LTD

6GFM180T 12V180AH

6GFM180T series is specially designed for telecom use with 15 years design life in float service. By adopting a new AGM separator and centralised venting system, the battery can be installed in any position while maintaining high reliability. The dimensions of the 6FMT series is designed for 19 and 23 cabinet installation. It is suitable for UPS/EPS applications.


Specification

Cells Per Unit	6
Voltage Per Unit	12V
Capacity	180AH@10hr-rate to 1.75V per cell @ 25°C
Weight	Approx. 55kg (Tolerance±3%)
Max. Discharge Current	1800A(5sec)
Internal Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25±5°C
Float Charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging	54A Current Limit
Equalization and Cycle service	14.6 to 14.8 VDC /unit Average at 25°C
Self Discharge	YAHENG Vale Regulated Lead Acid(VRLA) Can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using
Terminal	Terminal F9
Container Material	A.B.S. UL94-HB, Flammability resistance of UL94-V2 can be avail upon request

Dimensions

Unit: mm Dimension: 560(L)×125(W)×316(H)

Terminal F9

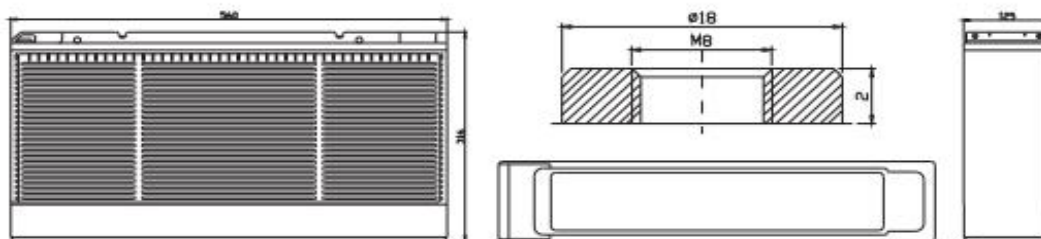

Constant Current Discharge Characteristics: A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	519.5	387.9	320.0	202.8	117.0	70.01	48.39	39.66	32.46	22.36	18.91	10.40
10.0V	504.5	369.1	313.5	199.4	116.5	69.48	48.20	39.47	32.27	22.18	18.72	10.21
10.2V	494.9	356.1	308.5	197.7	115.4	68.96	47.83	39.29	32.08	22.00	18.54	10.02
10.5V	454.2	328.6	293.8	192.7	114.3	68.43	47.65	38.92	31.70	21.81	18.36	9.83
10.8V	418.8	299.6	276.3	184.3	111.6	67.20	46.35	38.01	31.12	21.45	18.18	9.64
11.1V	376.4	267.8	247.8	172.6	106.0	6.22	44.31	36.17	29.79	20.54	17.63	9.07

Constant Power Discharge Characteristics: W(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	5373	4131	3520	2312	1352	825.2	575.8	472.7	387.3	267.0	225.9	124.7
10.0V	5267	4005	3464	2284	1349	820.8	576.0	472.1	386.3	265.7	224.5	122.5
10.2V	5265	3899	3425	2267	1338	815.9	573.5	471.1	384.9	263.9	222.5	120.2
10.5V	4898	3631	3267	2215	1326	809.9	571.3	466.7	380.4	261.8	220.3	118.0
10.8V	4557	3347	3081	2123	1302	799.6	555.7	456.1	373.5	257.4	218.1	115.7
11.1V	4214	3026	2773	1994	1246	769.9	531.7	434.0	357.4	246.5	211.6	108.9

All mentioned values are average values.



FUJIAN YAHENG POWER TECHNOLOGY GROUP CO.,LTD


Temperature and Valid Capacity

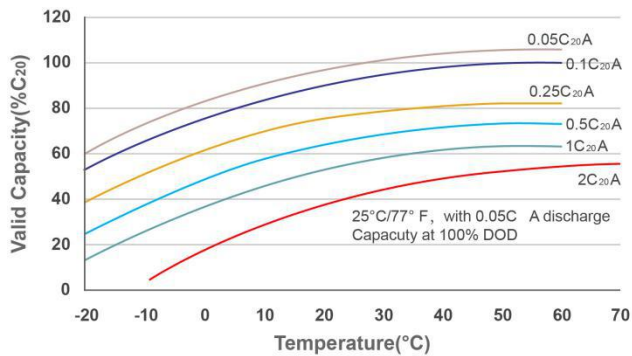

Discharge Characteristics at Various Rates @25°C/77



Charge characteristic curve for standby use

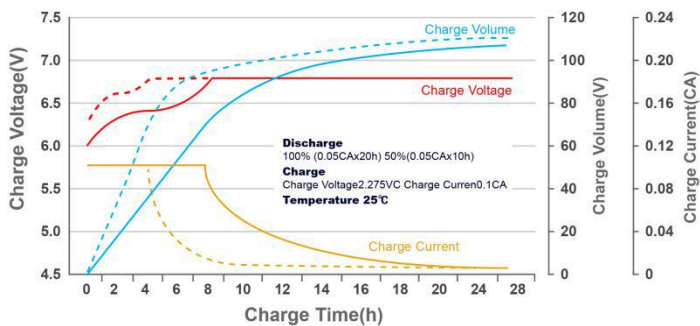

Storage characteristic



Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.75V	1.60V
Discharge Current (A)	$A \leq 0.2C$	$0.2C \leq A \leq 1.0C$	$\geq 1.0C$

Charge the batteries at least once every six months, if they are stored at 25°C

Charging Method:

Constant Voltage	$-0.2C \times 2h + 2.4 - 2.45V/cell \times 24h$, Max. Current 0.3CA
Constant Current	$-0.2C \times 2h + 0.1CA \times 12h$
Fast	$-0.2C \times 2h + 0.3CA \times 4.0h$

Maintenance & Cautions

Float Service

- ✘ Every month, recommend inspection every battery voltage
 - ✘ Every three months, recommend equalization charge for one time.
- Equalization charge method:
- Discharge: 100% rate capacity discharge.
- Charge: Max. Current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h
- ✘ Effect of temperature on float charge voltage: -3mV/Cell.
 - ✘ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

Contact us:

Fujian Yaheng Power Technology Group Co.,Ltd

Add: Yaheng Industrial Park, Jianyang District, Nanping City, Fujian Province, China

Website: www.yahengpower.com

Email: liwendu@yahengpower.com

Tel: +86-599-5837578 Fax: +86-599-5823986